

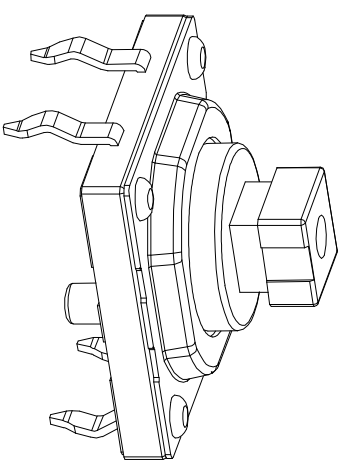
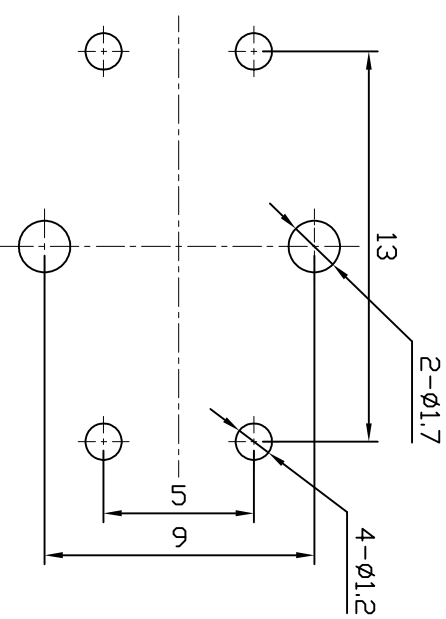
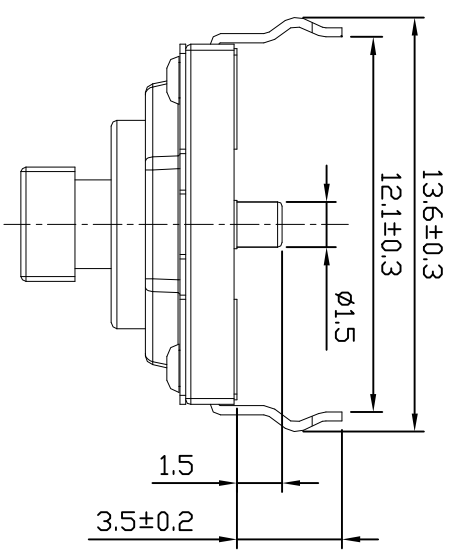



本公司智慧财产未经许可不得复制  
ming biao copyright may not be used without permission from ming biao.

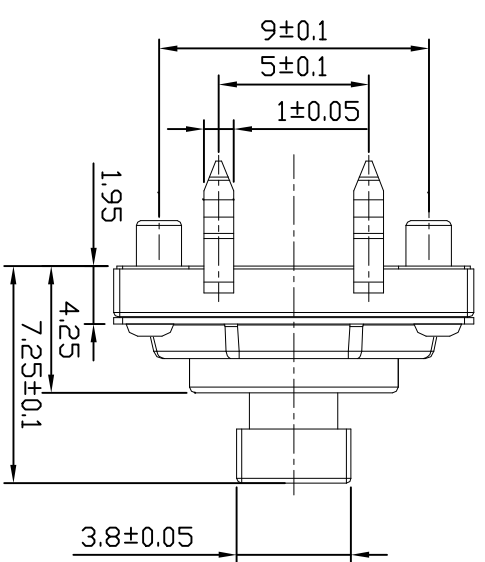

SPECIFICATIONS:

Operating temperature range: -20℃to+70℃  
Rating: 50mA, 12V DC Max  
Insulation resistance: 100MΩ min, 250V DC  
Dielectric strength: 250V AC for 1min  
Contact resistance: 100mΩ Max  
Life: 1, 000, 000 Cycles  
Travel: 0.25±0.05mm  
Operating force: 160±30gf/260±50gf

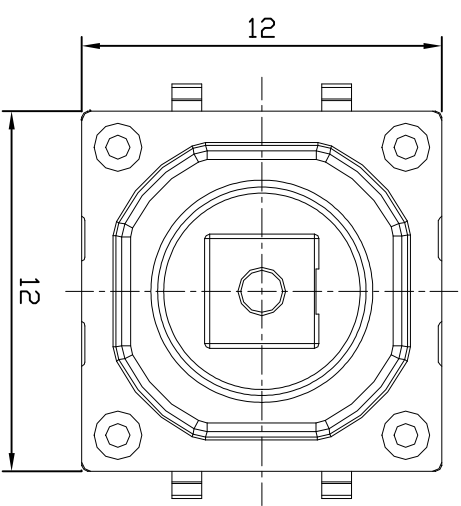

|                             |       |       |                                                            |              |             |
|-----------------------------|-------|-------|------------------------------------------------------------|--------------|-------------|
| Rohs COMPLIANT Pb-free RoHS |       |       | 东莞市铭标电子科技有限公司<br>Ming Biao Electronic Technology Co., Ltd. |              |             |
| TOLERANCE                   |       |       | DESIGN                                                     | DATE         | Tact Switch |
| UNLESS OTHERWISE STATED     |       |       | WYJ                                                        | 2025. 04. 27 |             |
| X.X                         | ±0.20 | SIZE  | CHKD                                                       | DATE         |             |
| X.XX                        | ±0.15 | REV   |                                                            | MODEL        | TVDP04-073  |
| X.XXX                       | ±0.10 | UNIT  | APPD                                                       | DATE         |             |
| ±                           | ±2°   | SCALE |                                                            | SHEET        | 1/3         |
|                             |       |       |                                                            | PRINT DATE   | 2025.04.27  |