

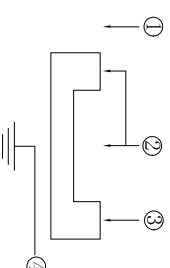
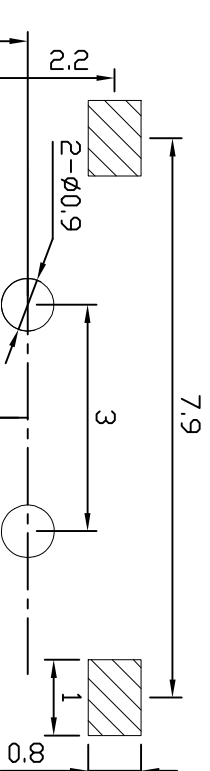
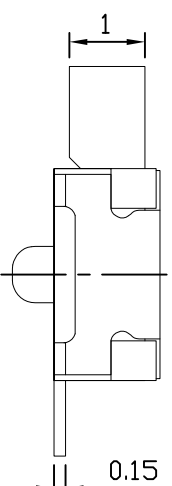


1	
2	
3	
4	
5	
6	
7	
8	
9	
10	

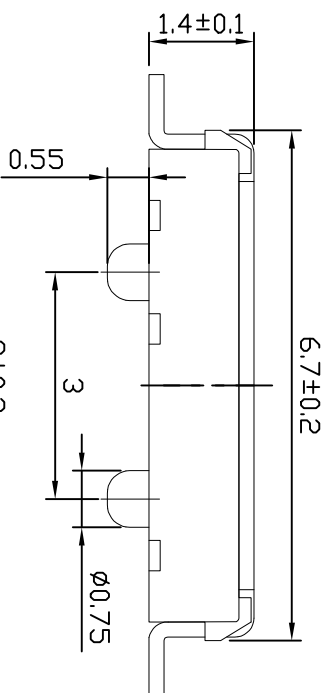


CIRCUIT

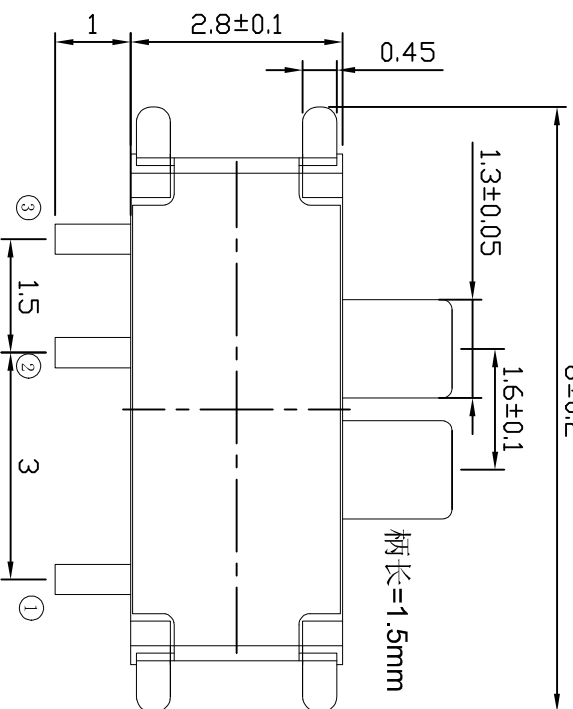

SPECIFICATIONS:

Operating temperature range: -40°C to $+85^{\circ}\text{C}$
 Rating: 50mA, 12V DC Max
 Insulation resistance: 100M Ω min, 100V DC
 Dielectric strength: 250V AC, 1Min
 Contact resistance: 100m Ω Max
 Life: 10, 000 Cycles
 Travel: 1.5 ± 0.25 mm
 Operating force: 180 ± 50 gf

P.C.B LAYOUT

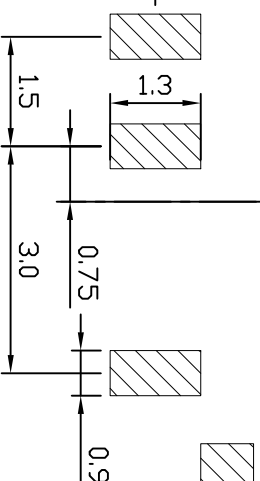Specification 材质

Part Name	Material	Specification
名称	颜色	材质
弹片	银白色	不锈钢
接触簧片	银白色/镀银	镀锌铜
盖板	银白色	黄铜
底座	黑色与镀银	LCP与黄铜
手柄	黑色	PA46



ROHS COMPLIANT Pb-free Pb RoHS Free				 东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd			
TOLERANCE				DESIGN	DATE	TITLE	Toggle switch
UNLESS OTHERWISE STATED				WJF	2025.03.28		
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	
X.XX	±0.15	REV	A				
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
∠	±2°	SCALE	10:1			PRINT DATE	2025.06.10
							